


Eccentric Reducer 25 - 300

ANSI # 150

S.G. Iron - EN-GJS-400-18-LT
Cast Steel - ASTM A 216 WCB
Steel Fabrication - ASTM A 234,
ASTM A 105
PTFE: ASTM D 4895 Type III
PFA - ASTM D 3307 type II
PVDF - ASTM D 3222
Polypropylene - ASTM D 4101

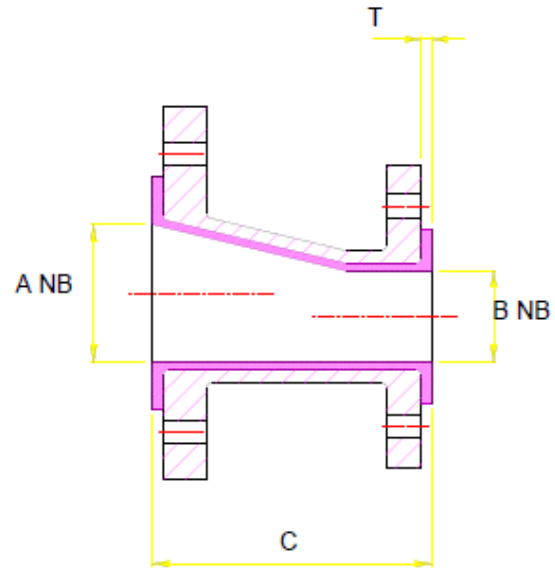

A mm	B mm	C mm	T mm	~kg
25	15	114	3	2
25	20	114	3	2
40	15	114	5.6	3
40	20	114	5.6	3
40	25	114	5.6	3
50	25	127	5.6	4
50	40	127	5.6	5
65	40	140	3	5.5
80	25	152	5.6	6
80	40	152	5.6	7
80	50	152	5.6	8
80	65	152	5.6	9
100	40	178	6.4	10
100	50	178	6.4	11
100	65	178	6.4	12
100	80	178	6.4	13
150	40	229	7.1	19
150	80	229	7.1	20
150	100	229	7.1	24
200	100	279	7.9	24
200	150	279	7.9	35
250	100	305	7.9	48
250	150	305	7.9	48
250	200	305	7.9	57
300	200	356	9.5	77
300	250	356	9.5	86

Tapped holes on cast steel WCB items on flange B only


Eccentric Reducer 350 – 600

ANSI # 150

Steel Fabrication - ASTM A 234,

ASTM A 105

PTFE: ASTM D 4894 Type

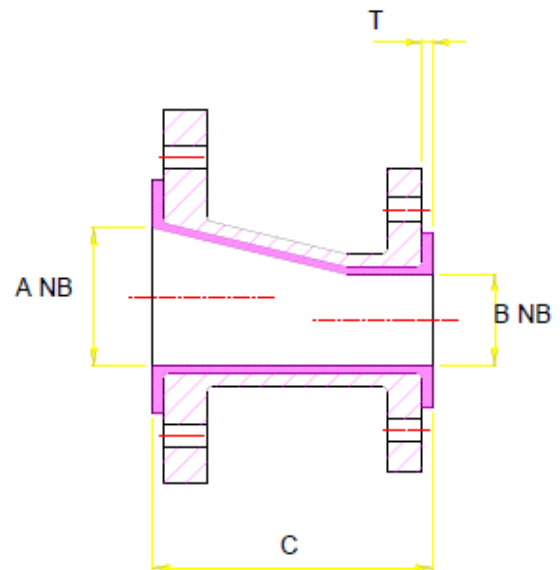

A mm	B mm	C mm	T mm	~kg
350	300	406	10	80
400	350	457	10	115
450	400	483	10	160
500	450	508	10	225
600	500	610	10	300

Reductions may be achieved by the use of combined reducers and reducing flanges. The overall length would be that of the reducer plus the reducing flange thickness.