


PIPE:

15 - 600 NPS

ANSI # 150

Steel Fabrication

PTFE: ASTM D 4894 Type IV & D 4895 Type III

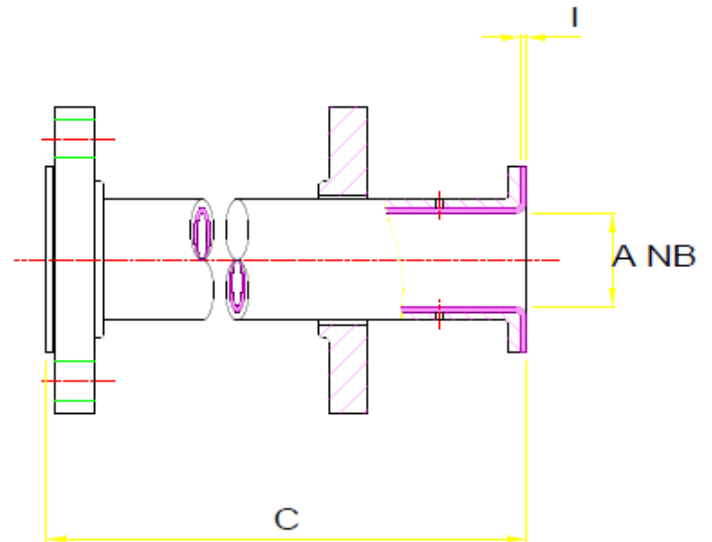

A mm	C mm	C mm	T mm		1m	+ 1m
	max.	min.	STD	HD	~kg	~kg
15	3,000	90	1.5	2	2	1.5
20	3,000	90	1.5	2	3	2.1
25	6,000	90	2.13	3.18	5.2	3.1
32	6,000	90	2.13	3.18	6.7	3.9
40	6,000	95	2.13	3.18	7.5	5
50	6,000	110	2.13	3.18	10.8	6.6
65	6,000	110	2.13	3.18	14.8	7.3
80	6,000	120	2.16	3.18	20	12.9
100	6,000	125	N.A.	4.25	29.8	18.6
125	4,500	140	N.A.	4.5	37	23
150	3,000	140	3.76	5.25	48.7	33.8
200	3,000	145	4.25	6.75	75.5	52
250	3,000	155	5.25	7.75	98.4	62
300	3,000	160	6.35	9	120	82
350	2,000	180	6.5	10	159	83.4
400	2,000	180	6.5	10	192	95.6
450	2,000	190	6.5	10	214	108
500	2,000	200	6.5	10	255	120.3
600	2,000	210	6.5	10	335	144.7