

Instrument Tee 25 - 300

ANSI # 150

S.G. Iron to EN-GJS-400-18-LT

Steel Fabrication

Body plate: BS 1501 - 151 - 430A


Tube: API 5L Gr. B

Flange: ASTM A 105N

PFA - ASTM D 3307 type II

PVDF - ASTM D 3222

Polypropylene - ASTM D 4101

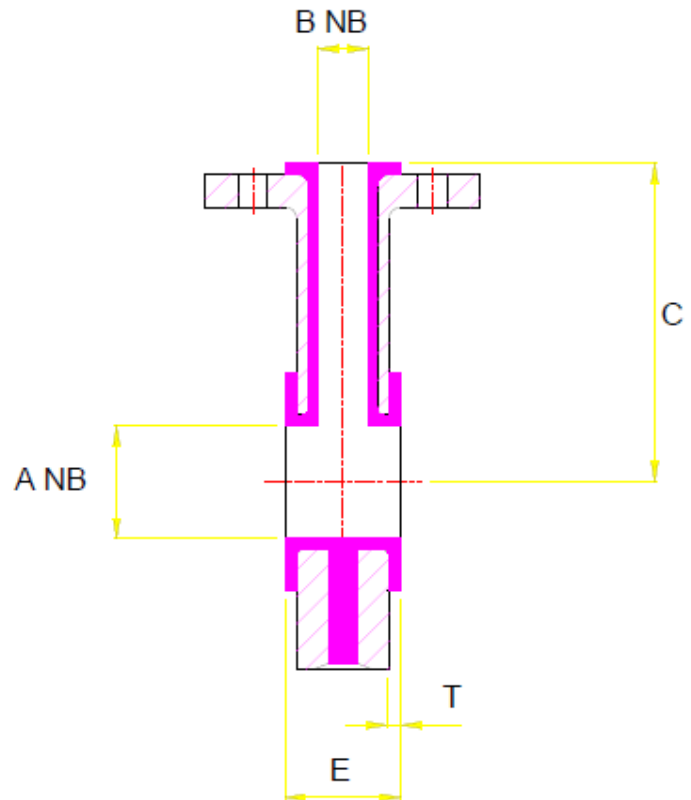

A	C	T	E	~kg	E	~kg	E	~kg	E	~kg	E	~kg	E	~kg
	mm	mm	mm		mm		mm		mm		mm		mm	
			x 15	x 15	x 20	x 20	x 25	x 25	x 32	x 32	x 40	x 40	x 50	x 50
25	89	5.6	51	4.2	51	4.5	51	2						
40	102	5.6	51	5.4	51	5.7	51	2.5	76	3.7	76	8.5		
50	141	5.6	51	6.8	51	7	51	3.3	76	4.9	76	11		5.6
80	160	5.6	51	9	51	9	51	4.3	76	6.4	76	15	89	7.4
100	179	5.6	51	10	51	10.2	51	5.5	76	8.2	76	16	89	9.4
125	205	6.4	51	14	51	14	51	6.2	76	9.7	76	23	89	11.1
150	205	6.4	51	15	51	16	51	7.5	76	11.2	76	29	89	12.8
200	237	7.1	51	17	51	18	51	10.7	76	16.0	76	35	89	18.3
250	264	7.9	51	25	51	26	51	12.5	76	18.7	76	41	89	21.4
300	318	7.9	51	32	51	33	51	14.5	76	21.7	76	53	89	24.8

8 - Hole patterns require threaded bolt holes on 50 nb branch items.

Instrument Tee 350 - 600

ANSI # 150


Steel Fabrication

Body plate: BS 1501 - 151 - 430A

Tube: API 5L Gr. B

Flange: ASTM A 105N

PFA - ASTM D 3307 type II

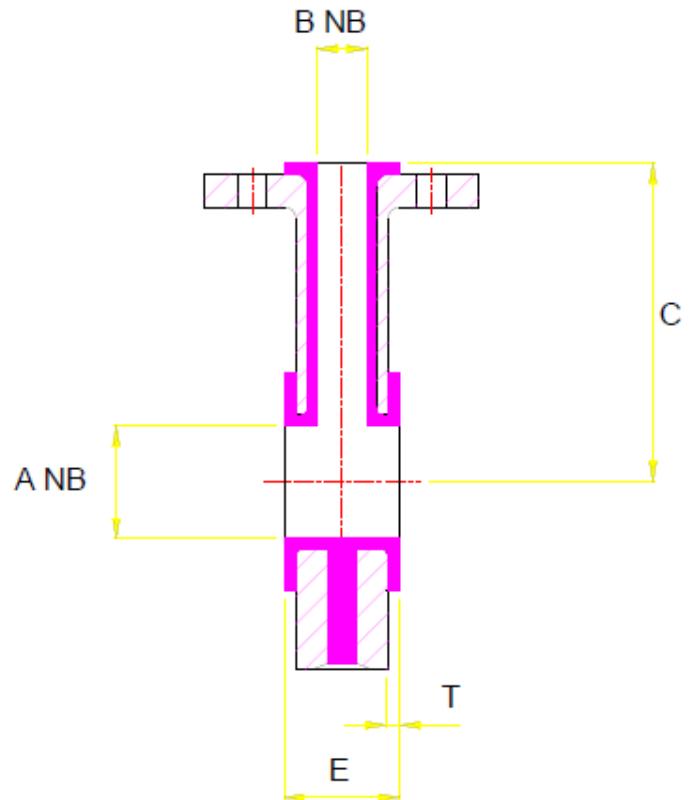

A	C	T	E(25)	~kg	E(40)	~kg	E(50)	~kg
350	330	10	90	77	90	150	90	175
400	360	10	90	100	90	195	90	230
450	380	10	90	120	90	235	90	275
500	410	10	90	148	90	290	90	340
600	470	10	90	210	90	410	90	475